
## Data sheet for dual control lifts with a full height door at the uppermost floor (max. travel 7m, 400kg)

For dual control lifts with a 1/2 height gate at the uppermost floor see separate data sheet.

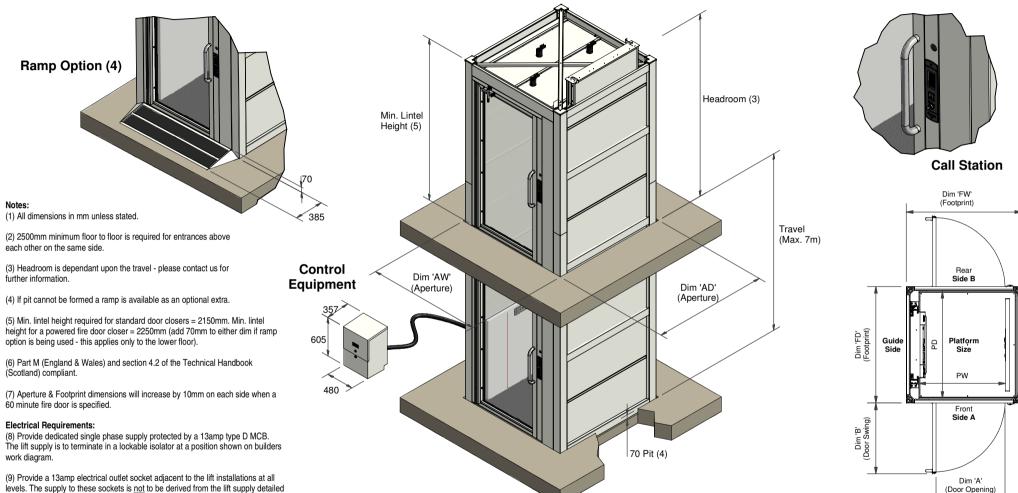

			(Footprint)					
			Rear Side B					
	Dim 'FD' (Footprint)	Guide Side	. Jenneson Julian	Platform Size				
	Dim 'B' (Door Swing)	r San	Ū.	Front Side A	ing)			
	40//	3) ( <del>3</del> )		- F	· · · · <del>/ 7</del> )			
; (-	+10/-0		Footprint (7)					
		n 'AD'	D	Dim 'FW' Dim 'F				
	- 1	560		1510	1526			

	Door opening	Door swing	Aperture (+10/-0) (/)		Footprint (7)	
Platform size (PW x PD)	Dim 'A'	Dim 'B'	Dim 'AW'	Dim 'AD'	Dim 'FW'	Dim 'FD'
1125 x 1400 (6)	900	1010	1540	1560	1510	1526
		•	•	•	•	•

Information sheet **SL 818T** 15/11/2016

(12) The drive unit and electrical control equipment are housed in a separate enclosure, which should be wall mounted and located within 5m (hose run) away from the base of the lift (guide side).

(11) The lift is fixed to the floor at the base of the enclosure. Fixings are also required at other points, the exact location depends on travel and configuration.

(10) Ensure that lighting at all landing levels is not less than 50lux.

in Note 7 above

Please contact us to discuss further.

The data sheet is for guidance only & must not be used for proper working drawings. Please contact us for particular details before proceeding. Owing to our policy of continual improvement, we reserve the right to alter specifications & dimensions without prior notice.