Loadings - Lifts with Upper Level Door (2m to 7m Travel)

Lift loads				
Position	FX (kN)	FY (kN)	FZ (kN)	MY (kN.m)
Α	0.6	2.4	3.2	0
В	4.6	7.3	4.5	1.66
D	1.2	3.6 (Note 3)	0.8	0

Notes:

1. Details provided apply to external applications where all specified fixings shall be made directly into solid substrate or structural members.

2. Loads

It is the customer's responsibility to ensure suitability of the building structure for the stated loads, both in terms of strength, & also suitability of the fixings proposed. If any doubts exist, it is advised that a structural engineer is consulted.

Loads from the lift occur as stated in the table & in sketch 'Lift Base'. All loads stated in the table occur at each position indicated in the sketch 'Lift Structure'. All loads stated are for 'worst case' conditions (of load & travel) & wind loading of 25 m/s. Where applicable, approropriate load factors have been applied. No 'safety factors' are included.

2a. Horizontal plane loads


Fixings at positions A, B & D are compulsory. Multiple fixings share the stated loads at B. Forces at A & B apply in push & pull directions & moment MY acts in positive & negative directions about the Y axis (see sketch 'Positive Axes'). Hoop 2 (see sketch 'Lift Structure') is not fitted when overall travel is less than 5m.

2b. Vertical plane loads

Fixings at D are compulsory. Fixings at D are made (vertically) into floor. Loads FY at D are due to structure weight. Additional vertical plane loads are shown in sketch 'Lift Base'; loads suffixed '*' correspond to contact points under lift platform buffers. All vertical plane loads act in the downward direction only

3. Loads shown are applicable for glass infill panels; this reduces to 2.5kN for laminate infill panels.

4. Suitable structures for reaction of loads A & B are expected to be cast concrete or steelwork only.

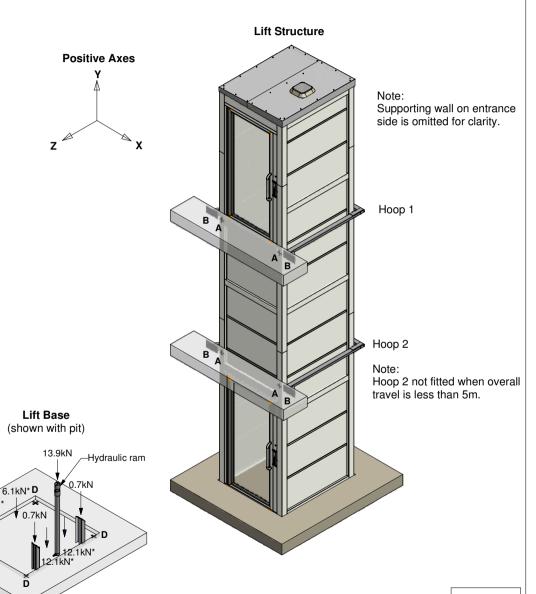

Waive

The data sheet is for guidance only & must not be used for proper working drawings. Please contact us for particular details before proceeding. Owing to our policy of continual improvement, we reserve the right to alter specifications & dimensions without prior notice.

Information sheet

SL 821T 10/08/2016