

Waiver:

This data sheet is for guidance only & must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement, we reserve the right to alter specifications & dimensions without prior notice.

For guidance only

MIDLIFT DL


Door options




General:

- All doors mild or stainless steel frame or panel
- Mild steel doors supplied prime painted for finishing to colour choice by others
- Doors provide clear opening 900mm (for 1100mm wide platform) or 800mm clear opening (900mm wide platform) x 2000mm high
- All doors manually operated with self closer as standard (powered door optional - see table)
- Landing call button integral in door frame, except 'Fire rated'
- All specification 'Features' marked ✓ available at extra cost (except where marked ✗) - see table
- All doors may be left or right hand hinged
- Dimensions shown are in mm & apply to 900mm clear opening width door


Standard

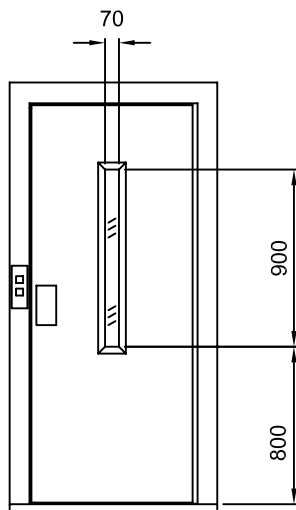

Panoramic

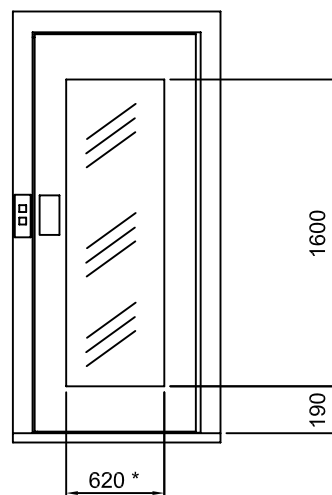

Fire rated

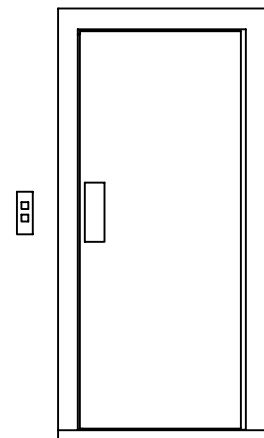

* This dimension 500 for 800 clear opening door

Specification details

Door type \ Feature	Prime painted RAL7038 ✖	Finish painted RAL7038	Additional galvanise treatment	Without vision panel ✖	Clad in stainless steel (AISI 304)	Made in stainless steel (AISI 316)	Fire rating, 60 or 120 min	Powered operation
Standard	✓	✓	✓	✓ Optional	✓	✓	✗	✓
Panoramic	✓	✓	✗	✗	✓	✗	✗	✓
Fire rated	✓	✓	✗	✓	✓	✓	✓	✓

✓ available

✗ not available

INFORMATION SHEET
AVL762
21.09.06