

Waiver:


This data sheet is for guidance only and must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.

For guidance only


MIDLIFT PX

Wheelchair


Vertical Lifting Platform 1100 x 1400 (Up to 4m Travel)
Adjacent Entrance Lower Floor

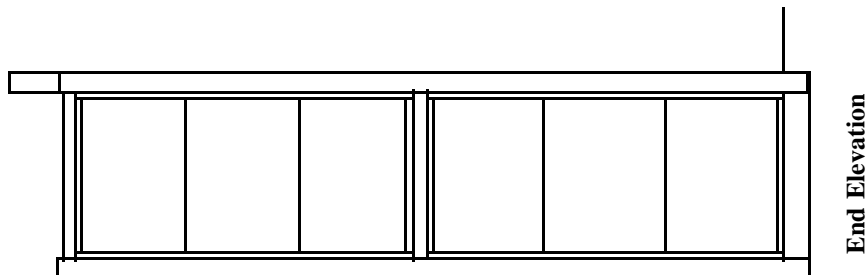


End Elevation

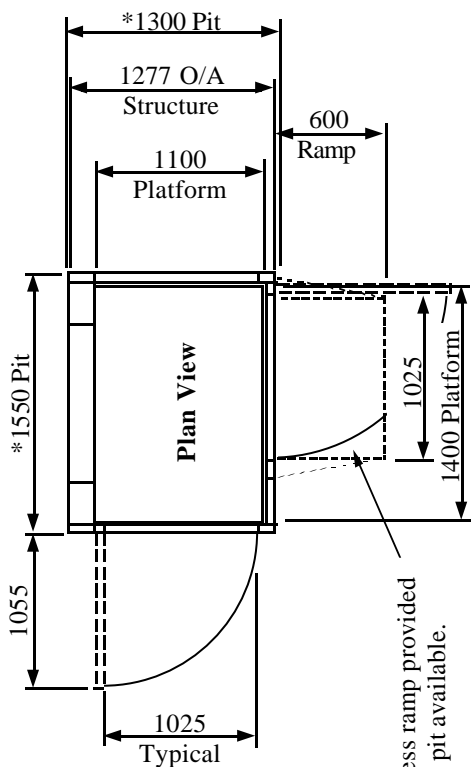

Access ramp provided if no pit available.

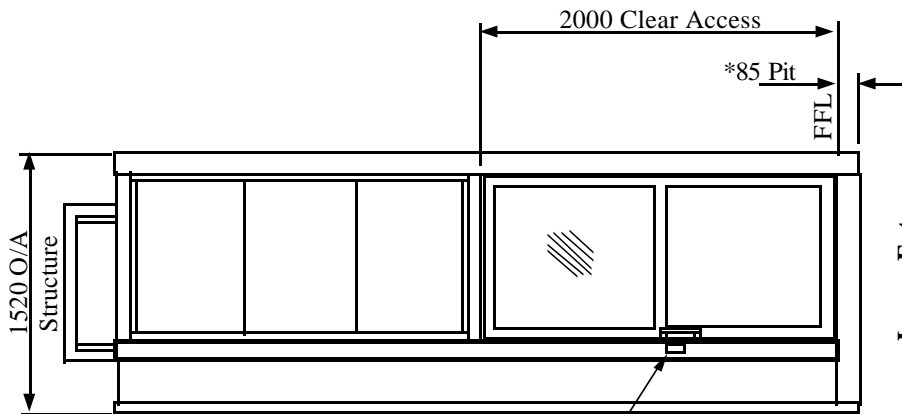

View on Lower Entrance

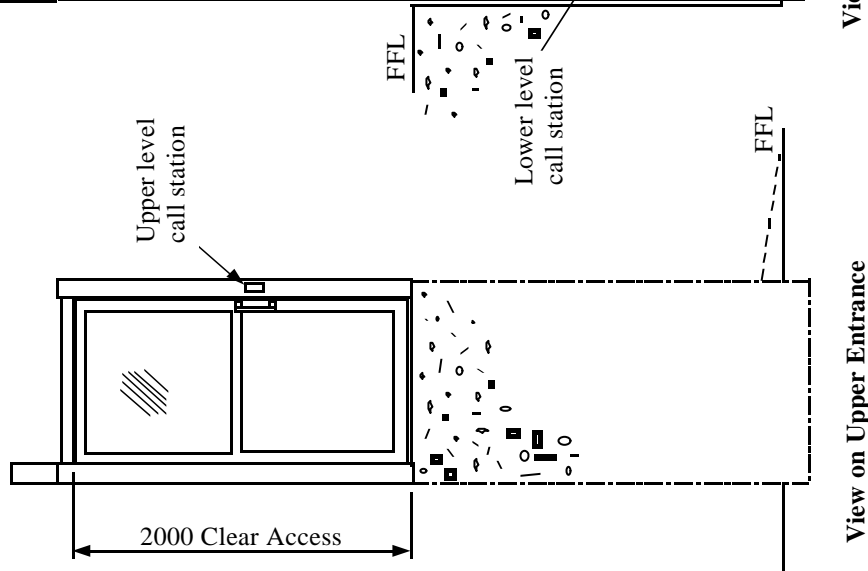

View on Upper Entrance

Control Equipment

The drive unit and electrical control equipment are housed in an enclosure (600mm high by 800mm wide by 300mm deep) which should be wall mounted at a minimum height of 1200mm and can be located up to 5 metres away from the lift.

Vertical Lifting Platform Specification Complies with BS 6440

- Load: 300Kg
 - Drive: Single speed electro-hydraulic
 - Speed: 0.1m/sec nominal
 - Travel: Up to 4m maximum
Note: Wall fixings required on guides side for all travel measurements.
 - Handing: Optional right or left.
 - Site: Internal only
 - Power supply: Dedicated 240v single phase AC (13A switched fused spur)
- *A pit is optional. It eliminates a ramp at the lower level.

INFORMATION SHEET
No. AVL 470
02.04.02