

Waiver:



This data sheet is for guidance only & must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement, we reserve the right to alter specifications & dimensions without prior notice.

For guidance only
MIDILIFT PX
 Wheelchair
 Vertical Lifting Platform 900 x 1400 (upto 2m travel)
 Through & same side entry / exit



Notes:

1. All dimensions in mm
2. 'Through' entrance arrangement shown

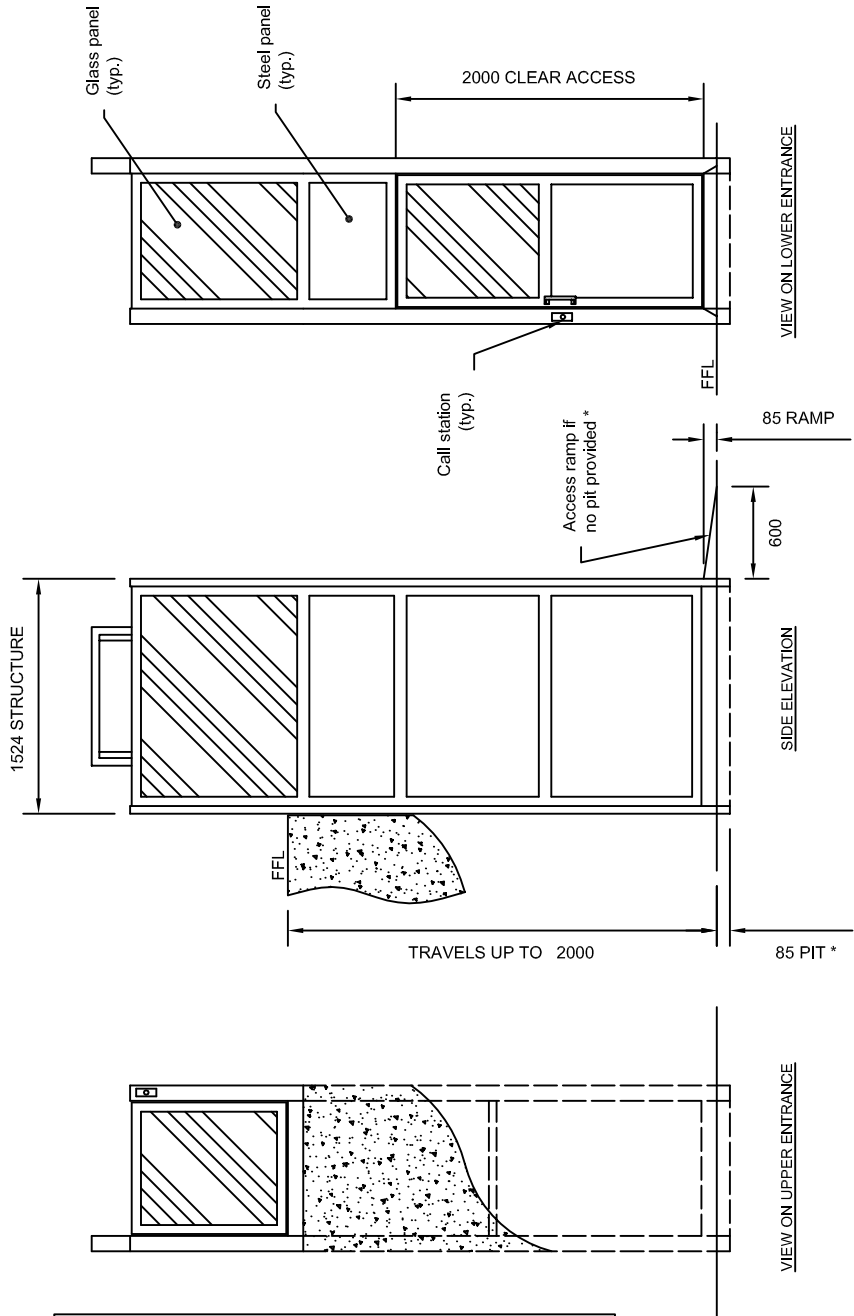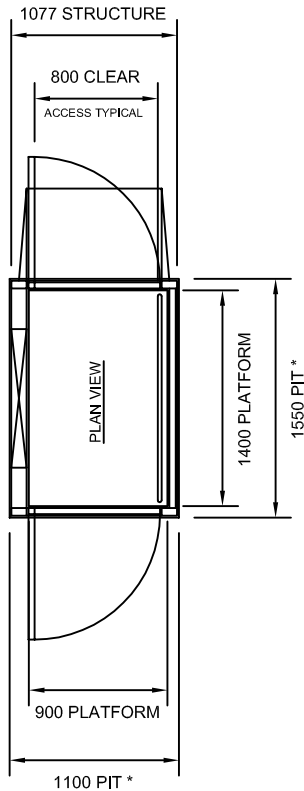

Control equipment

The drive unit & electrical control equipment are housed in an enclosure 610 high x 810 wide x 325 deep which should be wall mounted at a height of 1200 & can be located up to 5m away from the lift.

Vertical lifting platform specification
 Complies to BS6440, ISO9386-1 & Building Regulations Part M (2004 edition)

Load	300kg
Drive	single speed electro hydraulic
Speed	0.1m/s nominal
Travel	upto 4m maximum
	Note: wall fixings required on guides side for all travel measurements
Handing	optional right or left
Site	internal only
Power supply	dedicated 240V single phase ac (13A switched fused spur with RCD)

* a pit is optional - it eliminates a ramp at the lower level

INFORMATION SHEET
AVL500
 25.08.04