


# Stairiser SX

Technical data sheet for wheelchair platform stairlift  
1050 x 810 end access

Minimum headroom required	
Angle of stairs	Dim 'X'
20°	2117
25°	2224
30°	2342
35°	2476
40°	2629
45°	2810

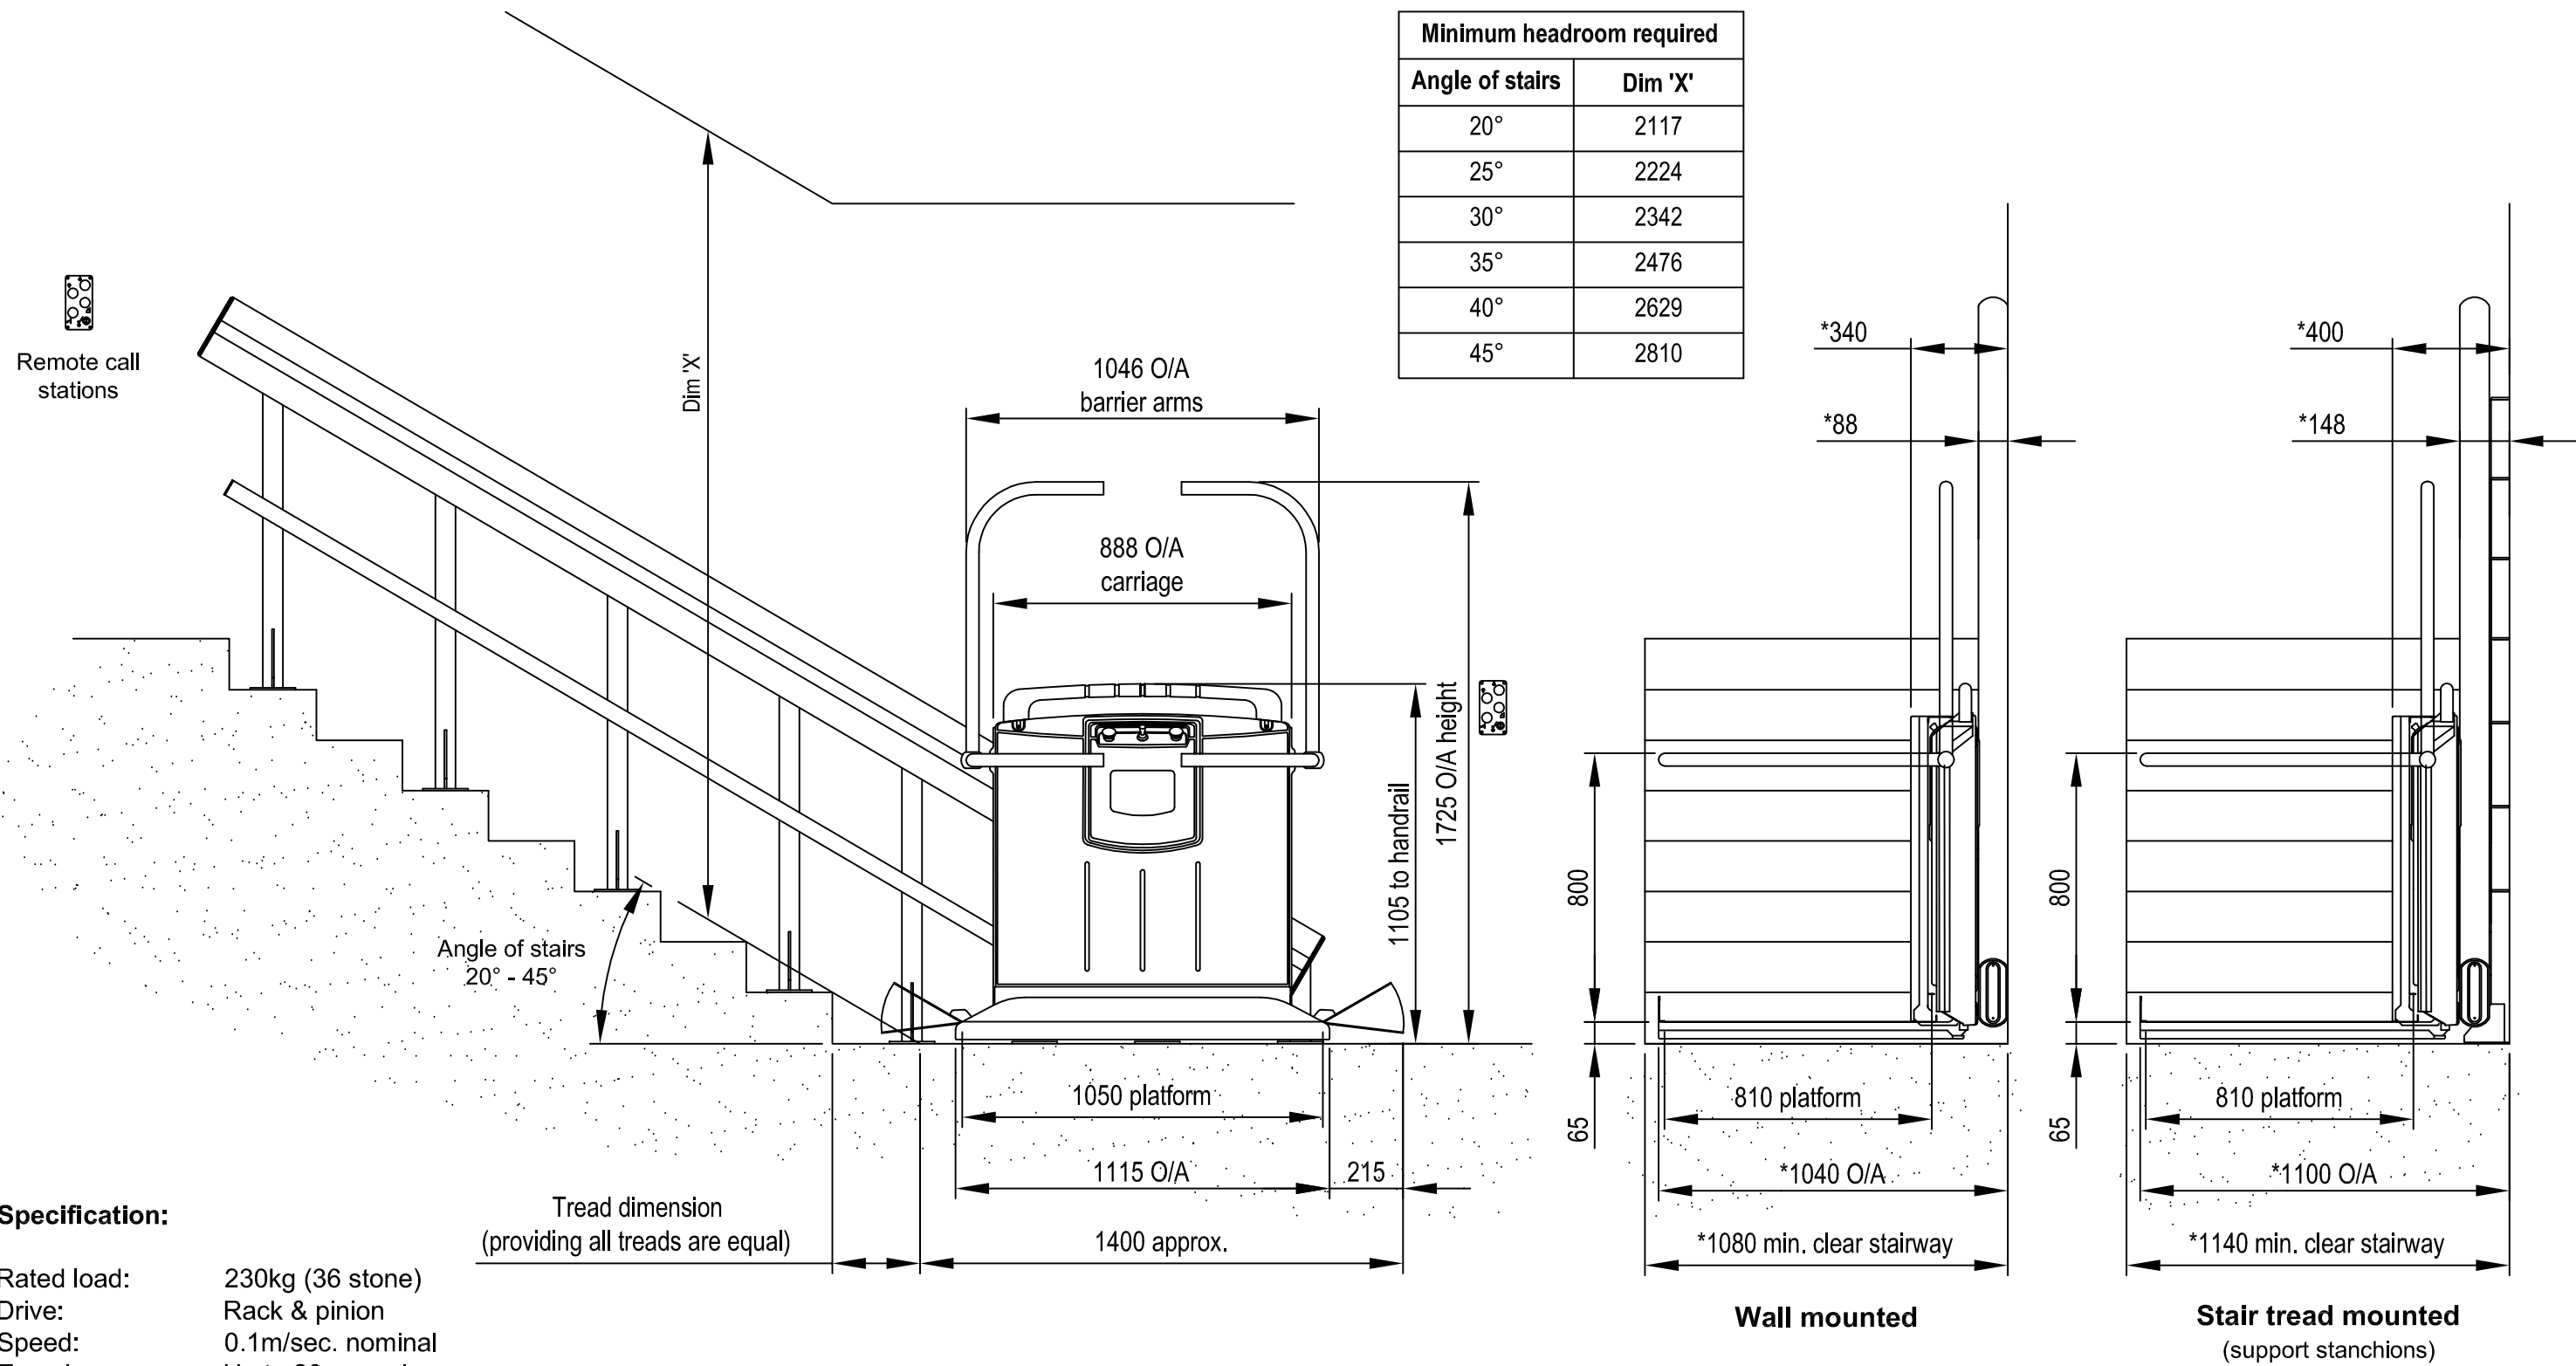

## Specification:

- Rated load: 230kg (36 stone)
- Drive: Rack & pinion
- Speed: 0.1m/sec. nominal
- Travel: Up to 20m maximum
- Angle of stairs: 20° - 45° maximum
- Site: Straight stairway without intermediate landings. Interior & exterior models available.
- Fixing: Wall mounted or stair tread mounted.
- Max. stops: 2
- Power supply: Dedicated 240V single phase AC
- Standard: Complies with ISO 9386-2

**\*Dimensions do not allow for skirting or stair stringer thickness**  
All dimensions in mm unless stated

## Waiver

This data sheet is for guidance only & must not be used for proper working drawings. Please contact your dealer for particular details before proceeding. Owing to our policy of continual improvement, we reserve the right to alter specifications & dimensions without prior notice.

Information  
sheet

**SX 701T**  
27.09.10