




An independent family business since 1867

Stairiser SX

Technical data sheet for wheelchair platform stairlift
1250 x 810 end access

Stannah

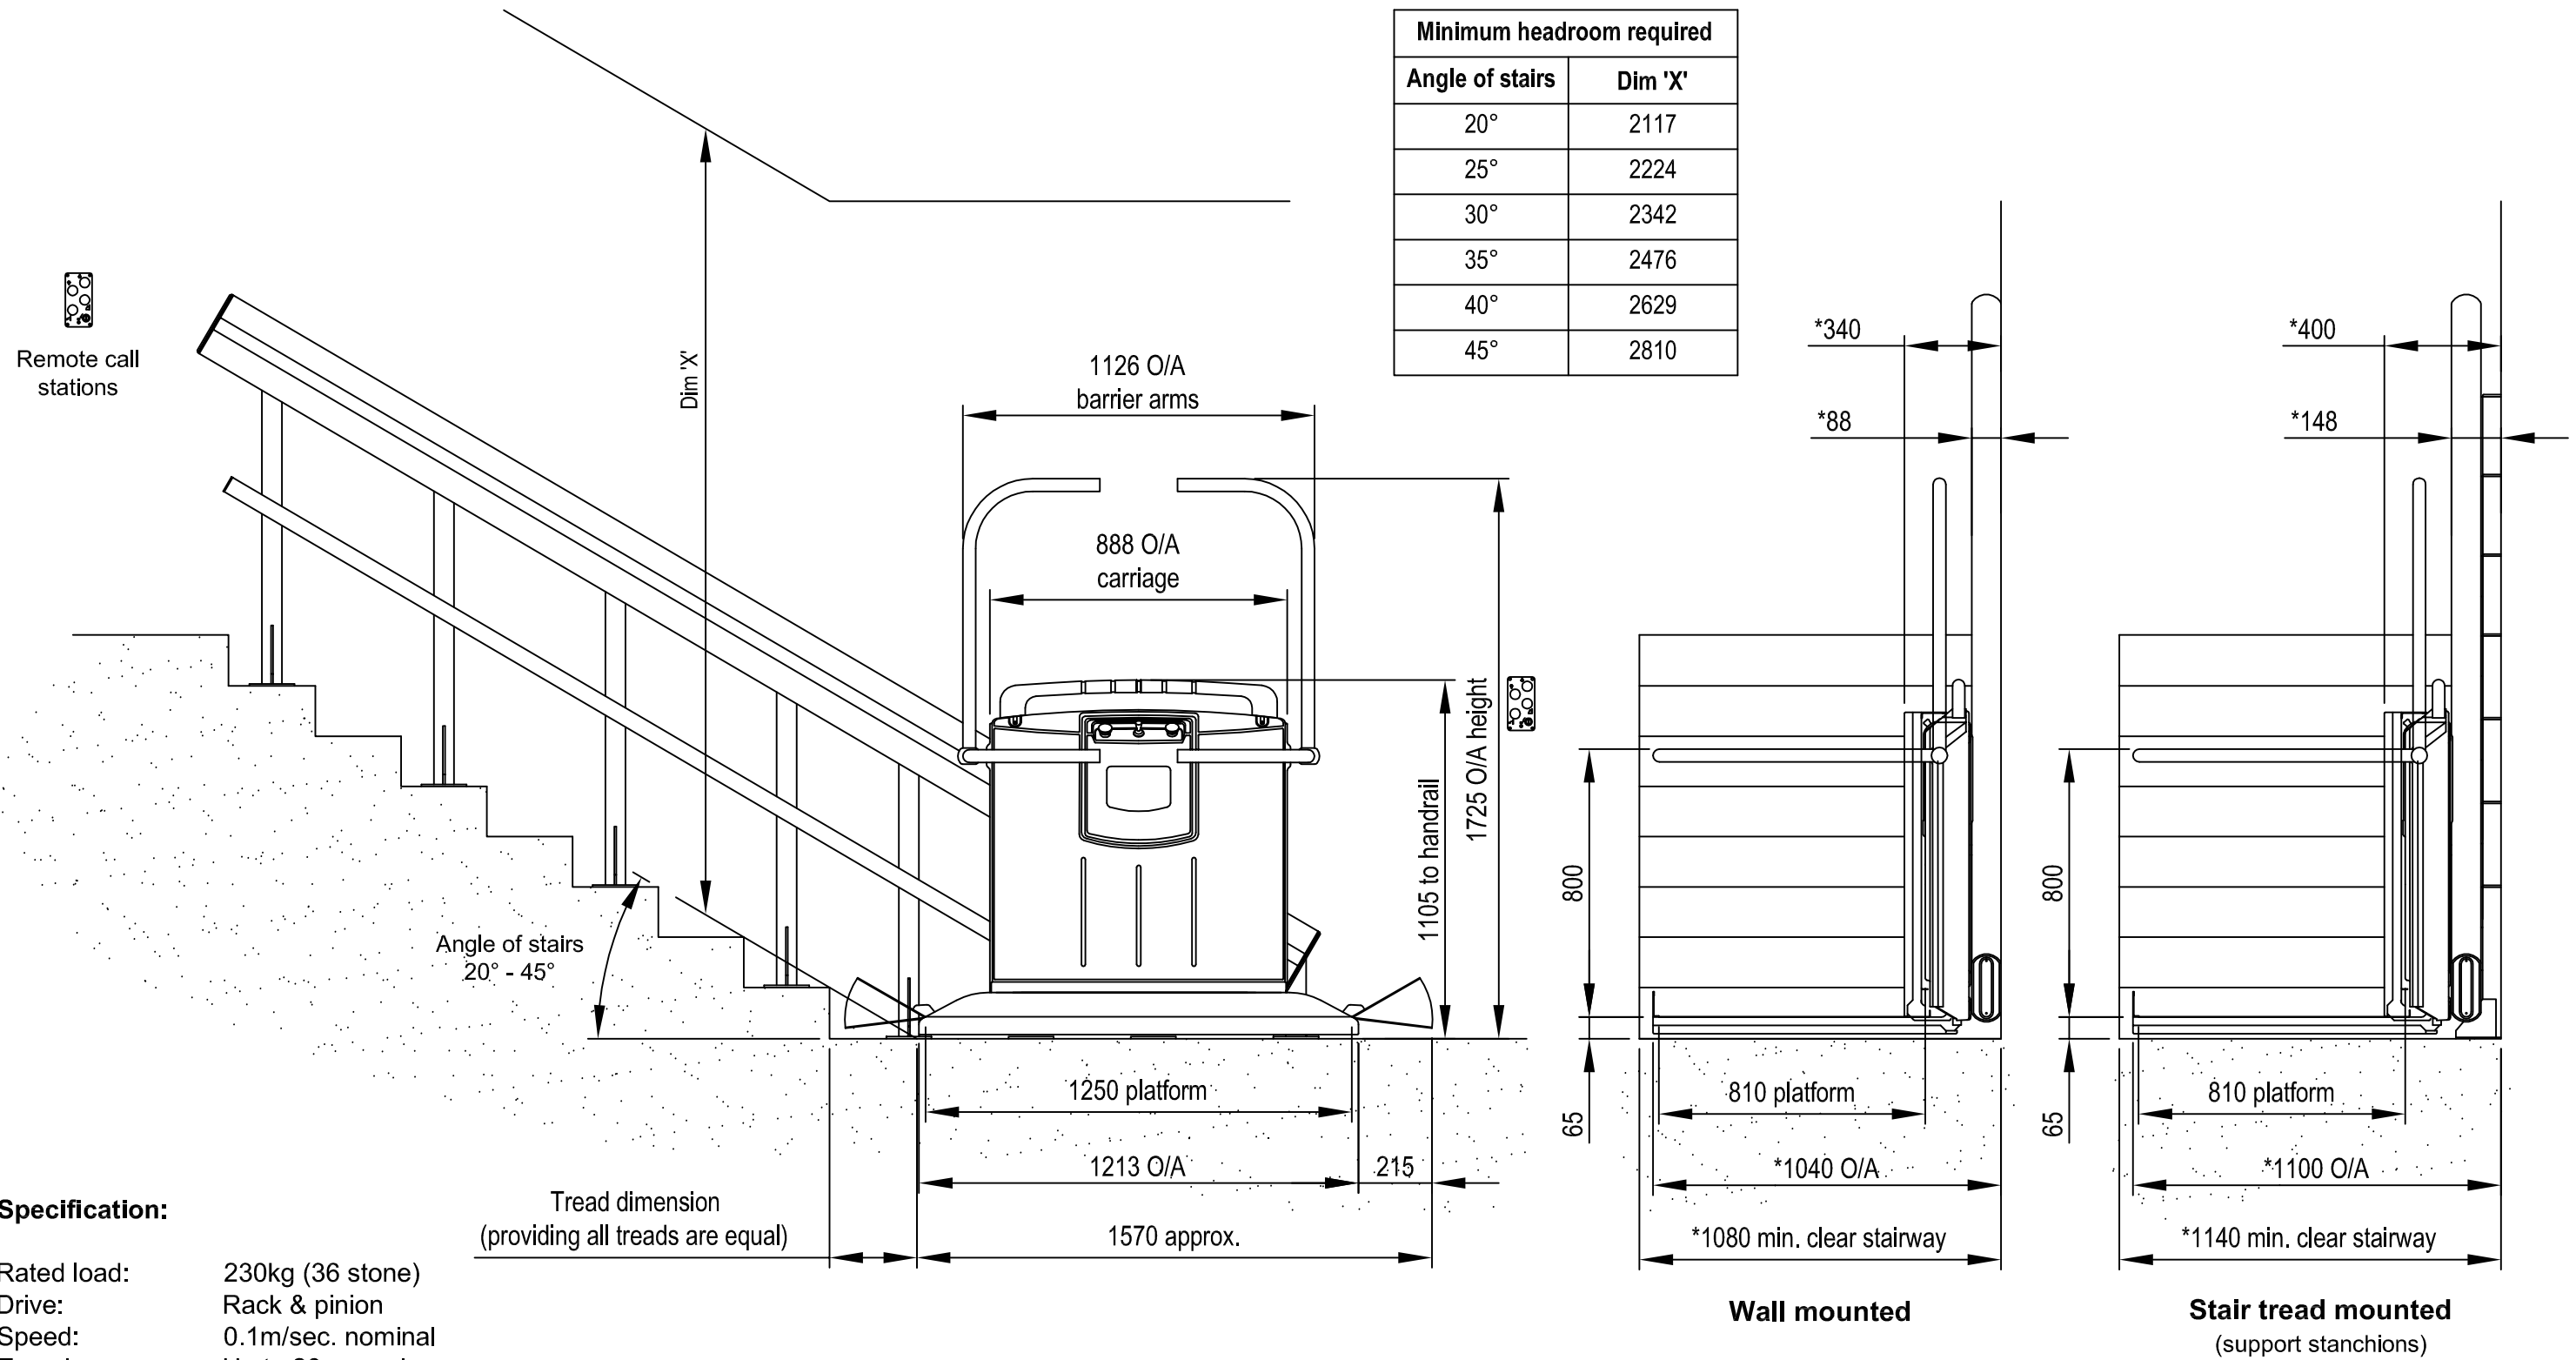

Specification:

- Rated load: 230kg (36 stone)
- Drive: Rack & pinion
- Speed: 0.1m/sec. nominal
- Travel: Up to 20m maximum
- Angle of stairs: 20° - 45° maximum
- Site: Straight stairway without intermediate landings. Interior & exterior models available.
- Fixing: Wall mounted or stair tread mounted.
- Max. stops: 2
- Power supply: Dedicated 240V single phase AC
- Standard: Complies with ISO 9386-2

***Dimensions do not allow for skirting or stair stringer thickness**
All dimensions in mm unless stated

Waiver

This data sheet is for guidance only & must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement, we reserve the right to alter specifications & dimensions without prior notice.

Wall mounted

Stair tread mounted
(support stanchions)

Anton Mill, Andover, Hampshire, SP10 2NX

Stannah Lifts Ltd.

Tel: 01264 339090

www.stannahlifts.co.uk

Information sheet
SX 704
27.09.10