




An independent family business since 1867

# Stairiser SX

Technical data sheet for wheelchair platform stairlift  
1250 x 810 side access

# Stannah

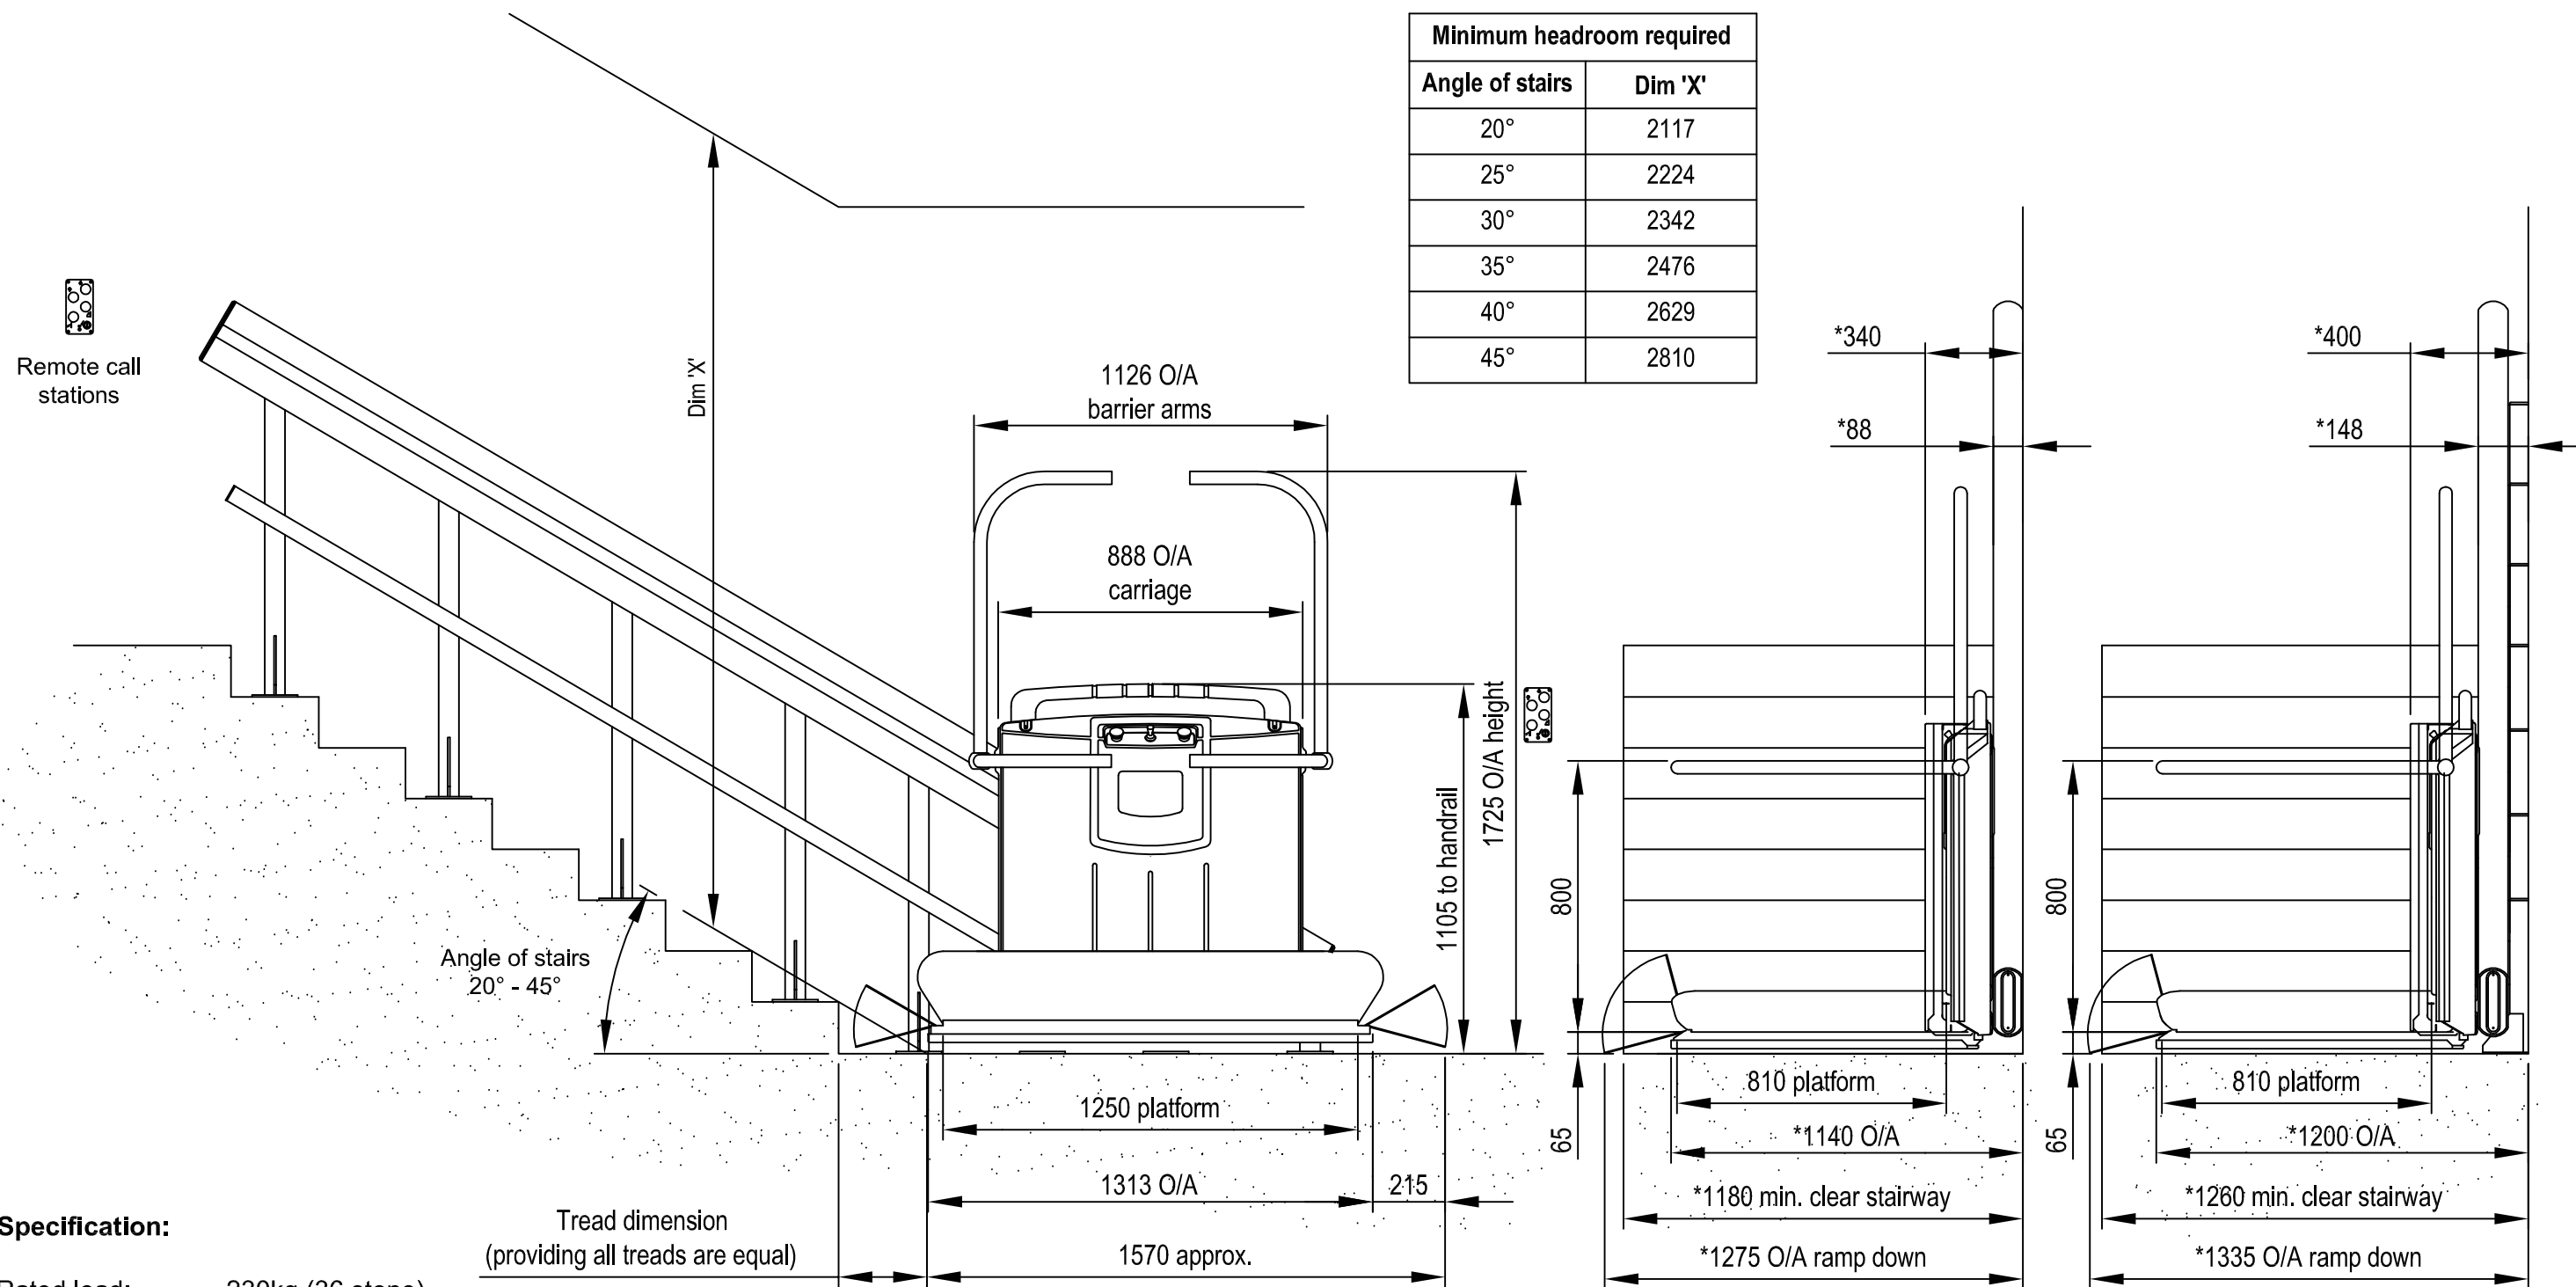

**Specification:**

- Rated load: 230kg (36 stone)
- Drive: Rack & pinion
- Speed: 0.1m/sec. nominal
- Travel: Up to 20m maximum
- Angle of stairs: 20° - 45° maximum
- Site: Straight stairway without intermediate landings. Interior & exterior models available.
- Fixing: Wall mounted or stair tread mounted.
- Max. stops: 2
- Power supply: Dedicated 240V single phase AC
- Standard: Complies with ISO 9386-2

**\*Dimensions do not allow for skirting or stair stringer thickness**  
All dimensions in mm unless stated

**Waiver**

This data sheet is for guidance only & must not be used for proper working drawings. Please contact Stannah Lifts for particular details before proceeding. Owing to our policy of continual improvement, we reserve the right to alter specifications & dimensions without prior notice.

**Wall mounted**

**Stair tread mounted**  
(support stanchions)

Anton Mill, Andover, Hampshire, SP10 2NX

**Stannah Lifts Ltd.**  
**Tel: 01264 339090**  
**www.stannahlifts.co.uk**

Information sheet  
**SX 705**  
27.09.10